

ZERO CAULK SPACERS - ZCS Series

Eliminates Caulk

MOUNTING:

- Blindside Walls - Insulated metal panels imp's, square tubes, framing... use jack nut/riquet nut
- Openside Walls - Cleanroom Wall Panels, Gypsum Board, Beams, Plates, Cement... use backside backing plate with lock nuts

APPLICATIONS:

- Cleanrooms and mechanical areas, including but not limited to the biotech, pharmaceutical, food processing, beverage, dairy, cosmetic, chemical, water treatment, and semiconductor industries.
- Low flow & low pressure systems with moderate vibration: WFI, SIP, CIP, process, utility & instrument lines, WFI, SIP, CIP, process, utilities & instrument lines

SIZES:

- Support Range: 1/4" - 2" Tube and 1/2" - 1 1/2" Pipe for Copper and PVC Coated Pipe and EMT Conduit
- Tight fit Anchors and loose fit Guides are offered in CSD Series

MATERIALS:


- 304 and 316 stainless steels - for 316, replace 304 with 316 in the part number
- FDA grade Silicone Rubber Gaskets with Silver ion additive

FEATURES:

- Silicone Rubber Plug/Gasket creates a drainable and cleanable seal to surface
- Silicone Rubber Plug/Gasket eliminates the use of caulk - caulk will break-down over time creating voids
- Silver ion additive is blended in the FDA grade Silicone Rubber Gaskets, impeding bacterial, mold, fungus from forming on the gasket
- Jack Nut's tensile strengths are over 820 pounds
- No exposed threads or openings

GRAPHICS: A FEW MINUTES PROCESS

- A. Stock and actuated Rivet Nut
1. Drill 7/16" hole into IMP
2. Rivet nut placed in hole
3. Rivet nut actuated and secured to IMP via
MARSON, M39043 MJN-2 JACK NUT INSERT TOOL

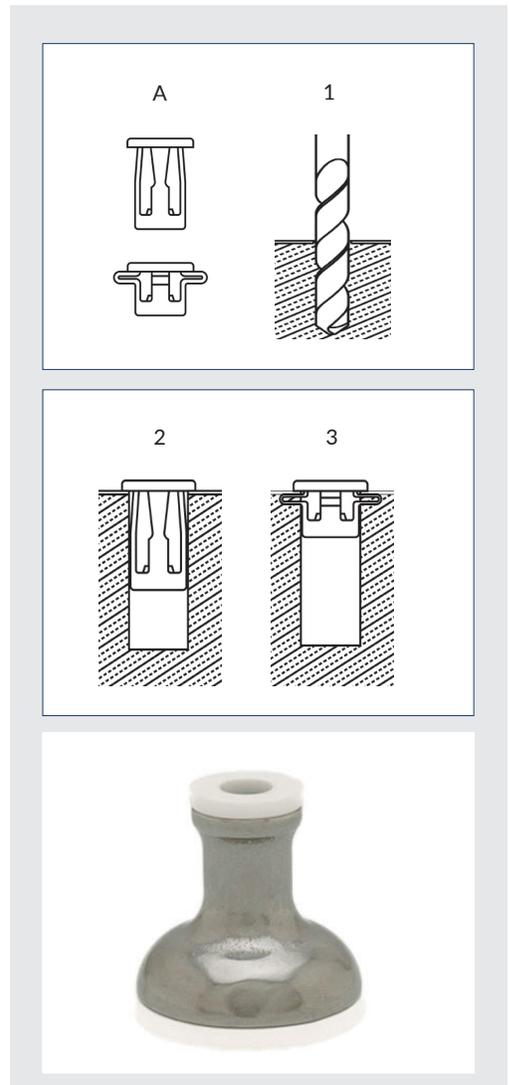

Refer to www.syntirocorp.com or call Syntiro for most up to date information


ZERO CAULK 1" & 2" WALL TO COMPONENT - ZCS, SPACERS

Silicone rubber gasket seals to surfaces, no gaps

ZC1S-025-304

1" SPACER

UP TO 1/4" THREAD

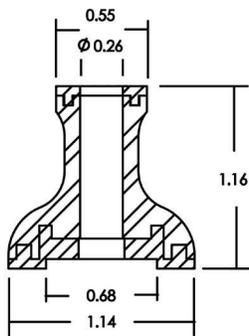


ZC1S-025-304
with Jack Nut

ZC2S-025-304

2" SPACER

UP TO 1/4" THREAD

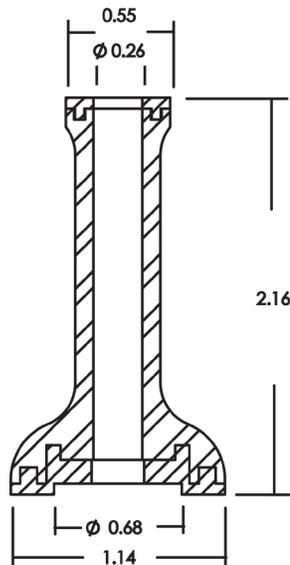


ZC1S-038-304

1" SPACER

UP TO 3/8" THREAD

with 1/4" Gaskets

ZC1S-038-025-304

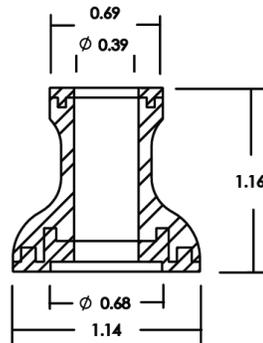

ZC2S-038-025-304
3/8" Hole with 1/4"
Sealing Plugs

ZC2S-038-304

2" SPACER

UP TO 3/8" THREAD

with 1/4" Gaskets

ZC2S-038-025-304

